

A Rate-Compatible Sphere-Packing Analysis of Feedback Coding with Limited Retransmissions

Adam R. Williamson, Tsung-Yi Chen and Richard D. Wesel

Department of Electrical Engineering

University of California, Los Angeles

Los Angeles, California 90095

Email: adamroyce@ucla.edu; tychen@ee.ucla.edu; wesel@ee.ucla.edu

Abstract—Recent work by Polyanskiy et al. and Chen et al. have excited new interest in using feedback to approach capacity with low latency. Polyanskiy showed that feedback identifying the first symbol at which decoding is successful allows capacity to be approached with surprisingly low latency. This paper uses Chen’s rate-compatible sphere-packing (RCSP) analysis to study what happens when symbols must be transmitted in packets, as with a traditional hybrid ARQ system, and limited to relatively few (six or fewer) incremental transmissions.

Numerical optimizations find the series of progressively growing cumulative block lengths that enable RCSP to approach capacity with the minimum possible latency. RCSP analysis shows that five incremental transmissions are sufficient to achieve 92% of capacity with an average block length of fewer than 101 symbols on the AWGN channel with SNR of 2.0 dB.

The RCSP analysis provides a decoding error trajectory that specifies the decoding error rate for each cumulative block length. Though RCSP is an idealization, an example tail-biting convolutional code matches the RCSP decoding error trajectory and achieves 91% of capacity with an average block length of 102 symbols on the AWGN channel with SNR of 2.0 dB. We also show how RCSP analysis can be used in cases where packets have deadlines associated with them (leading to an outage probability).

I. INTRODUCTION

Though Shannon showed in 1956 [1] that noiseless feedback does not increase the capacity of memoryless channels, feedback’s other benefits have made it a staple in modern communication systems. Feedback can simplify the encoding and decoding operations and has been incorporated into incremental redundancy (IR) schemes proposed as early as 1974 [2]. Hagenauer’s work on rate-compatible punctured convolutional (RCPC) codes allows the same encoder to be used in various channel conditions and uses feedback to determine when to send additional coded bits [3]. The combination of IR and hybrid ARQ (HARQ) continues to receive attention in the literature [4], [5] and industry standards such as 3GPP.

Although it cannot increase capacity in point-to-point channels, the information-theoretic benefit of feedback for reducing latency through a significant improvement in the error exponent has been well understood for some time. (See, for example, [6]–[9].) Recent work [10]–[13] casts the latency benefit of feedback in terms of block length rather than error exponent, generating new interest in the practical value of feedback for approaching capacity with a short average block length.

Polyanskiy et al. provided achievability bounds for the maximum rate that can be accomplished with feedback for a finite block length [10], [11] and also demonstrated the energy-efficiency gains made possible by feedback [14]. Polyanskiy uses an elegant, single, “stop feedback” symbol (that can occur after any transmitted symbol) that facilitates the application of Martingale theory to capture the essence of how feedback can allow a variable-length code to approach capacity. A compelling example from Polyanskiy et al. shows that for a binary symmetric channel with capacity $1/2$, the average block length required to achieve 90% of the capacity is smaller than 200 symbols.

For practical systems such as hybrid ARQ, the “stop feedback” symbol may only be feasible at certain symbol times because these systems group symbols together for transmission in packets, so that the entire packet is either transmitted or not. In [12], [13], Chen et al. used a code-independent rate-compatible sphere-packing (RCSP) analysis to quantify the latency benefits of feedback in the context of such grouped transmissions. Chen et al. focused on the AWGN channel and also showed that capacity can be approached with surprisingly small block lengths, similar to the results of [10], [11]. However, this initial work of Chen et al. is limited to a demonstration example that required several approximations.

Using the RCSP approach of Chen et al. as its foundation, this paper introduces an optimization technique and uses it to explore how closely one may approach capacity with only a handful of incremental transmissions. For a fixed number of information bits k and a fixed number of maximum transmissions m , a numerical optimization algorithm is introduced that determines the block lengths of each incremental transmission to maximize the expected throughput. We consider only $m \leq 6$ and show that this is sufficient to achieve more than 90% of capacity while requiring surprisingly small block lengths similar to those achieved by Polyanskiy et al. and Chen et al.

While RCSP is an idealized scheme, it provides meaningful guidance for the selection of block lengths and the sequence of target decoding error rates, which we call the decoding error trajectory. A 1024-state rate-compatible punctured tail-biting convolutional code using the block lengths determined by our RCSP optimization technique achieves the RCSP decoding error trajectory and essentially matches the throughput and latency performance of RCSP for $m = 5$ transmissions. Our

results, like those of Polyanskiy et al. and Chen et al., assume that the receiver is able to recognize when it has successfully decoded. The additional overhead of, for example, a cyclic redundancy check (CRC) byte has not been included in the analysis. Somewhat longer block lengths would be required to overcome this overhead penalty.

The paper is organized as follows: Section II reviews the RCSP analysis. Section III describes the RCSP numerical optimization algorithm used to determine transmission lengths and shows the throughput vs. latency performance achieved by using these transmission lengths for up to six rate-compatible transmissions. Section IV introduces the decoding error trajectory and shows how RCSP performance can be matched by a real convolutional code using the transmission lengths identified in the previous section. Section V shows how the RCSP analysis can be applied to scenarios that involve strict latency and outage probability constraints. Section VI concludes the paper.

II. RATE-COMPATIBLE SPHERE-PACKING (RCSP)

A. Review of Sphere-Packing

Let us briefly review the sphere-packing analysis presented in [12], [15] for a memoryless AWGN channel. Consider a codebook of size 2^k that maps $k = NR_c$ information symbols into a length- N codeword with rate R_c . The channel input and output can be written as:

$$Y = X(j) + Z, j \in 1, 2, \dots, 2^k, \quad (1)$$

where Y is the output (received word), $X(j)$ is the codeword of the j th message, and Z is an N -dimensional i.i.d. Gaussian vector. Let the received SNR be η and assume without loss of generality that each noise sample has unit variance. The average power of received word Y is then $N(1 + \eta)$. As in [12], the largest possible squared decoding radius r^2 assuming that spheres occupy all available volume is

$$r^2 = \frac{N(1 + \eta)}{2^{2k/N}}. \quad (2)$$

A bounded-distance decoder declares any message within a distance r of codeword $X(j)$ to be message j . Otherwise, a decoding error is declared. Because the N Gaussian noise samples together obey a chi-square distribution with N degrees of freedom, the probability $P(\zeta)$ of decoding error associated with decoding radius r is

$$P(\zeta) = P\left(\sum_{\ell=1}^N z_\ell^2 > r^2\right) = 1 - F_{\chi_N^2}(r^2), \quad (3)$$

where the z_ℓ are standard normal distributed random variables with zero mean and unit variance and $F_{\chi_N^2}(x)$ is the CDF of a chi-square distribution with N degrees of freedom.

B. Sphere-Packing for Rate-Compatible Transmissions

The idea of RCSP is to assume that sphere-packing performance can be achieved by each transmission in a sequence of rate-compatible transmissions. Thus the idealized sphere-packing analysis is applied to a modified incremental

redundancy with feedback (MIRF) scheme as described in [12]. MIRF works as follows: k information symbols are coded with an initial block length $N_1 = I_1$. If the receiver cannot successfully decode, the transmitter will receive a NACK and send I_2 extra symbols. The decoder attempts to decode again using all received symbols for the current codeword, i.e., with block length $N_2 = I_1 + I_2$. The process continues for $i = 3, \dots, m$, where m is the maximum number of transmissions. The decoded block length N_j of the j th transmission is $\sum_{i=1}^j I_i$. If decoding is not successful after m transmissions, the decoder discards the m transmissions and the process begins again with the transmitter resending the I_1 initial symbols. This scheme with $m = 1$ is standard ARQ.

The squared decoding radius of the j th cumulative transmission is

$$r_j^2 = \frac{N_j(1 + \eta)}{2^{2k/N_j}}, \quad (4)$$

and the marginal probability of decoding error $P(\zeta_j)$ associated with decoding radius r_j is

$$P(\zeta_j) = P\left(\sum_{\ell=1}^{N_j} z_\ell^2 > r_j^2\right), \quad (5)$$

where the z_ℓ are standard normal distributed random variables with zero mean and unit variance.

However, this marginal probability is not what is needed. The probability of a decoding error in the j th transmission depends on previous error events. Indeed, conditioning on previous decoding errors $\zeta_1, \dots, \zeta_{j-1}$ makes the error event ζ_j more likely than the marginal distribution would suggest. The joint probability $P(\zeta_1, \dots, \zeta_j)$ is

$$\begin{aligned} P(\zeta_1, \dots, \zeta_j) &= P\left(\bigcap_{i=1}^j \zeta_i\right) \\ &= \int_{r_1^2}^{\infty} \int_{r_2^2 - t_1}^{\infty} \dots \int_{r_{j-1}^2 - \sum_{i=1}^{j-2} t_i}^{\infty} f_{\chi_{I_1}^2}(t_1) \dots f_{\chi_{I_{j-1}}^2}(t_{j-1}) \times \\ &\quad \left(1 - F_{\chi_{I_j}^2}\left(r_j^2 - \sum_{i=1}^{j-1} t_i\right)\right) dt_{j-1} \dots dt_1. \end{aligned} \quad (6)$$

We compute the expected number of channel uses (i.e., latency or average block length) λ and the expected number of transmissions τ as

$$\lambda = \frac{I_1 + \sum_{i=2}^m I_i P\left(\bigcap_{j=1}^{i-1} \zeta_j\right)}{1 - P\left(\bigcap_{j=1}^m \zeta_j\right)}, \tau = \frac{1 + \sum_{i=1}^{m-1} P\left(\bigcap_{j=1}^i \zeta_j\right)}{1 - P\left(\bigcap_{j=1}^m \zeta_j\right)}. \quad (7)$$

The expected throughput R_t is given by

$$R_t = \frac{k}{\lambda} = \frac{k \left(1 - P\left(\bigcap_{j=1}^m \zeta_j\right)\right)}{I_1 + \sum_{i=2}^m I_i P\left(\bigcap_{j=1}^{i-1} \zeta_j\right)}. \quad (8)$$

TABLE I
OPTIMIZED TRANSMISSION LENGTHS $N_1 = I_1$ AND RATES R_c FOR
IDEAL-SPHERE-PACKING ARQ WITH INFORMATION LENGTHS k .

k	16	32	64	128	256
$N_1 = I_1$	31	60	116	222	429
R_c	0.516	0.533	0.552	0.577	0.597

III. CHOOSING I_i VALUES TO MAXIMIZE THROUGHPUT

A. Selecting I_1 for the $m = 1$ (ARQ) Special Case

In the special case of $m = 1$ (when only the initial transmission of length I_1 is ever transmitted), MIRF is ARQ. In this case the expected number of channel uses given by (7) can be simplified as follows:

$$\lambda_{ARQ} = \frac{I_1}{1 - P(\zeta_1)} = \frac{I_1}{F_{\chi_{I_1}^2}(r_1^2)}, \quad (9)$$

which yields an expected throughput of

$$R_{tARQ} = (k/I_1)F_{\chi_{I_1}^2}(r_1^2) = R_c F_{\chi_{k/R_c}^2}(r_1^2), \quad (10)$$

where $r_1^2 = \frac{k/R_c(1+\eta)}{2^{2R_c}}$. If we fix the number of information bits k , (10) becomes a quasiconcave function of the initial code rate $R_c = k/I_1$ [16], allowing the optimal code rate R_c^{opt} , which maximizes the throughput R_t for a given k , to be found numerically.

Table I presents the optimal initial code rates R_c and transmission lengths $N_1 = I_1$ for ARQ assuming ideal sphere-packing computed using (10), with the restriction that the lengths I_i must be integers. The maximum achievable throughput in the $m = 1$ (ARQ) RCSP scheme is plotted as the red (diamond markers) curve in Fig. 1. For $m > 1$, identifying the transmission lengths I_i which minimize the latency λ in (7) is not straightforward due to the joint decoding error probabilities in (6). The next section describes a method for obtaining a good set of transmission lengths I_i for the $m > 1$ case.

B. Algorithm for Selecting I_i Values

In [12], Chen et al. demonstrated one specific RCSP scheme with ten transmissions that could approach capacity with low latency. Specifically, the transmission lengths were fixed to $I_1 = 64$ and $I_2, \dots, I_{10} = 10$, while k was varied to maximize throughput. In contrast, in this paper we build on the intuition of the ARQ case presented above to fix both k and the number of transmissions m , in order to search for the set of transmission lengths I_i that maximizes throughput. We seek to identify approximately how much throughput can be achieved using feedback with a small number of incremental transmissions, specifically $m \leq 6$. Furthermore, we seek insight into what the transmission lengths should be and what decoding error rates allow the sequence of transmissions to be most efficient.

The restriction to a small m allows exact computation of (6) in Mathematica, avoiding the approximations of [12]. To reflect practical constraints, we restrict the lengths I_i to be

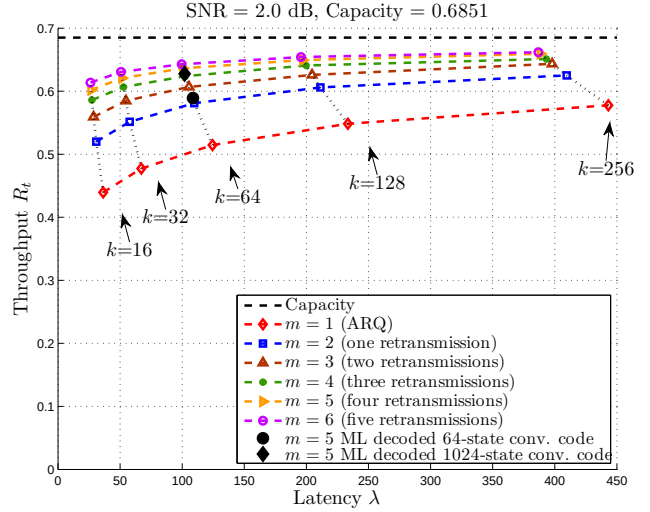


Fig. 1. Throughput vs. latency for rate-compatible sphere-packing with m rate-compatible transmissions $m \in \{1, \dots, 6\}$ with transmission lengths I_i identified according to the algorithm in Fig. 2.

integers. Fig. 2 presents the algorithm for selecting the I_i values.

The computational complexity of (6), which increases with the transmission index j , forces us to limit attention to a well-chosen subset of possible transmission lengths. Thus, our present results may be considered as lower bounds to what is possible with a fully exhaustive optimization. Fig. 1 shows the throughput vs. latency performance achieved by RCSP using the algorithm in Fig. 2 for $m \in \{1, \dots, 6\}$ on an AWGN channel with SNR 2.0 dB. As m is increased, each additional retransmission brings the expected throughput R_t closer to the channel capacity, though with diminishing returns. The scenario in [11], in which the variable-length feedback (VLF) codes studied allow feedback after each individual bit is transmitted, may be considered the limit of MIRF as $m \rightarrow \infty$.

- 1) Fix k and m .
- 2) **for** transmission index $i = 1, \dots, m$ **do**
- 3) **for** specified ranges of values for $I_i, \dots, I_1$ **do**
- 4) Compute the squared decoding radius r_i^2 as in (4).
- 5) Compute the joint probability of decoding error after the i th transmission, $P(\bigcap_{j=1}^i \zeta_j)$, as in (6).
- 6) **if** $i = m$ **then**
- 7) Compute and store the expected latency λ and number of transmissions τ as in (7).
- 8) Compute and store the expected throughput R_t as in (8).
- 9) **end if**
- 10) **end for**
- 11) **end for**
- 12) Pick the set of lengths $I_1, \dots, I_m$ that maximizes R_t .

Fig. 2. Algorithm for Selecting Lengths I_i

The points on each curve in Fig. 1 represent values of k ranging from 16 to 256 information bits. Fig. 1 shows, for example, that by allowing up to four retransmissions ($m = 5$) with $k = 64$ RCSP can achieve 91% of capacity with an average block length of 102 symbols.

IV. COMPARISON OF RCSP AND CONVOLUTIONAL CODES

RCSP makes the rather optimistic assumption that a family of rate-compatible codes can be found that performs, at each rate, equally well as codes that pack decoding spheres so well that they use all of the available volume. Lattice theory would suggest that such codes might be hard to find since the packing density of lattices actually decreases as dimension increases. However, we will show in this section that a rate-compatible tail-biting convolutional code can indeed match the performance of RCSP, at least for $m = 5$.

A. Two Convolutional Codes

We consider two rate=1/3 convolutional codes from [17]: a 64-state code with generator polynomial $(g_1, g_2, g_3) = (133, 171, 165)$ and a 1024-state code with $(g_1, g_2, g_3) = (3645, 2133, 3347)$, where the generator notation is octal. We restrict our attention to tail-biting implementations of these convolutional codes because the throughput efficiency advantage is important for the relatively small block lengths we consider. Simulations study the performance of these two codes in the MIRF setting for the AWGN channel with SNR 2 dB, as shown in Fig. 1. The simulations presented here focus on the $k = 64$ case.

The transmission lengths I_i used in the simulations are exactly those identified by the algorithm presented in Fig. 2. Table II shows the results of the $m = 5$ optimization (i.e., the set of lengths I_i found to achieve the highest throughput). Thus our simulations used $I_1 = 85$, $I_2 = 12$, $I_3 = 8$, $I_4 = 12$, $I_5 = 16$. The induced code rates of the cumulative blocks are $64/85=0.753$, $64/97=0.660$, $64/105=0.610$, $64/117=0.547$ and $64/133=0.481$. Note that the initial code rate is above the channel capacity of 0.685.

Hagenauer pioneered rate-compatible puncturing of convolutional codes in 1988 [3] and provided an approach for optimization based on periodic puncturing. While we are currently exploring optimized puncturing that matches the specific needs of MIRF, the results we present here employ pseudorandom (but rate-compatible) puncturing.

TABLE II
RESULTS OF THE ALGORITHM OF FIG. 2 FOR $m = 5$ AND AN AWGN CHANNEL WITH SNR 2 dB.

k	I_1	I_2	I_3	I_4	I_5
16	19	4	4	4	8
32	38	8	8	8	12
64	85	12	8	12	16
128	176	14	14	14	28
256	352	24	24	24	48

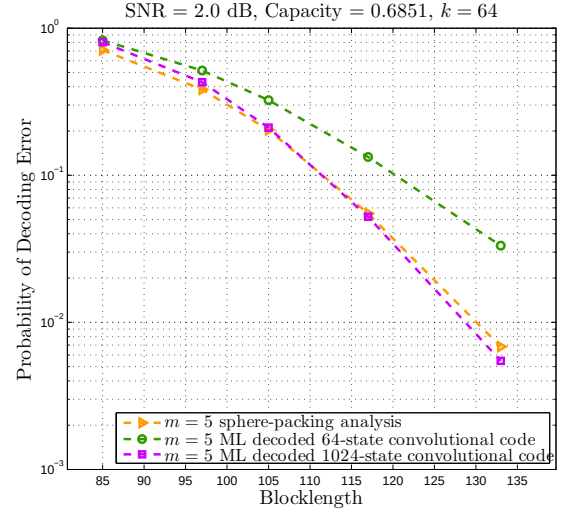


Fig. 3. A comparison of the decoding error trajectories of the sphere-packing analysis and simulated convolutional codes, for up to five transmissions with optimized block lengths.

B. Decoding Error Trajectory Comparison

In addition to prescribing the lengths I_i , the algorithm in Fig. 2 also computes the joint decoding errors of (6), which we call the “decoding error trajectory” prescribed by RCSP. If we can find a rate-compatible family that can achieve this decoding error trajectory, then we can match the RCSP performance. Fig. 3 shows the decoding error trajectory for $m = 5$ transmissions and $k = 64$ information bits, for both the sphere-packing analysis and the convolutional code simulations. While the 64-state code is not powerful enough to match RCSP performance, the 1024-state code closely follows the RCSP trajectory. Thus there exist practical codes, at least in some cases, that achieve the idealized performance of RCSP. Indeed, Fig. 1 plots the (λ, R_t) points of the two convolutional codes, demonstrating that the 1024-state code achieves 91% of capacity with an average latency of 102 symbols, almost exactly coinciding with the RCSP point for $m = 5$ and $k = 64$. The convolutional code’s ability to match a mythical sphere-packing code is due to maximum likelihood (ML) decoding, which has decoding regions that completely fill the multidimensional space (even in high dimensions).

C. Caveat

These simulation results assume that the receiver is able to recognize when it has successfully decoded. This same assumption is made by the RCSP analysis, Polyanskiy et al., and Chen et al. While this assumption does not undermine the essence of this demonstration of the power of feedback, its practical and theoretical implications must be reviewed carefully, especially when very short block lengths are considered. An important practical implication is that the additional overhead of a CRC required to avoid undetected errors will drive real systems to somewhat longer block lengths than those presented here. This will affect the choice of error control code. An important theoretical implication is that this analysis

cannot be trusted if the block lengths become too small. This assumption allows block errors to become block erasures at no cost. Consider the binary symmetric channel (BSC). If the block length is allowed to shrink to a single bit, then this seemingly innocuous assumption turns the zero capacity BSC with transition probability $1/2$ into a binary erasure channel with probability $1/2$, which has a capacity of $1/2$ instead of zero. Both the practical and theoretical problems of this assumption diminish as block length grows. However, a quantitative understanding of the cost of knowing when decoding is successful and how that cost changes with block length is an important area for future work.

V. RCSP WITH LATENCY AND OUTAGE CONSTRAINTS

As presented, MIRF has an outage probability of zero because it never stops trying until a message is decoded correctly. With slight modifications, we can adapt the MIRF scheme and algorithm presented in Fig. 2 to incorporate strict constraints on latency (so that the transmitter gives up after m transmissions) and outage probability (which would then be nonzero).

To handle these two new constraints, we restrict the probability of decoding error after m transmissions, $P(\zeta_1, \dots, \zeta_m)$, to be less than a specified threshold p_{outage} . Without modifying the computations of the error probabilities $P(\zeta_1, \dots, \zeta_j)$ in (6), we update step 12 of the algorithm to the following:

Pick the set of lengths that yields the optimal (maximum) throughput s.t. $P(\zeta_1, \dots, \zeta_m) \leq p_{\text{outage}}$.

Now, when there is a decoding error on the m th transmission, the transmitter declares an outage event and proceeds to encode the next k information bits. This scheme may be suitable for delay-sensitive multimedia communication, in which data packets are not useful to the receiver after their decoding deadlines have passed.

The error probabilities $P(\zeta_1, \dots, \zeta_j)$ are still given by (6), though the expected number of channel uses λ and the expected number of transmissions τ are now given by

$$\lambda = I_1 + \sum_{i=2}^m I_i P\left(\bigcap_{j=1}^{i-1} \zeta_j\right), \tau = 1 + \sum_{i=1}^{m-1} P\left(\bigcap_{j=1}^i \zeta_j\right). \quad (11)$$

The expected throughput R_t is again given by (8). We update the algorithm in Section III-B to compute the latency λ using (11) instead of (7). The main difference now is that there is a nonzero probability of outage.

VI. CONCLUSION

The purpose of this paper is to further the conversation that will bring the information theory of feedback and the communication practice of feedback closer together. Beginning with the idealized notion of rate-compatible codes with decoding spheres that completely fill the available volume, the paper eventually demonstrates a convolutional code with performance strikingly similar to the ideal rate-compatible sphere-packing (RCSP) codes.

An algorithm is presented that uses RCSP analysis to find the highest throughput that can be achieved for a fixed information length k and a fixed number of retransmissions. This algorithm also provides the transmission lengths of the initial and subsequent transmissions and the sequence of decoding error probabilities or “decoding error trajectory” that characterizes the throughput-maximizing performance. RCSP predictions and simulation results agree in demonstrating that feedback permits 90% of capacity to be achieved with about 100 transmitted symbols assuming that the decoder knows when it has decoded correctly. However, the implications of this assumption for short block lengths warrant further investigation and the development of analysis that does not hinge on this assumption.

REFERENCES

- [1] C. E. Shannon, “The zero error capacity of a noisy channel,” *IEEE Trans. on Info. Th.*, vol. PGIT-2, pp. 8–19, Sep. 1956.
- [2] D. Mandelbaum, “An adaptive-feedback coding scheme using incremental redundancy (corresp.),” *Information Theory, IEEE Transactions on*, vol. 20, no. 3, pp. 388 – 389, May 1974.
- [3] J. Hagenauer, “Rate-compatible punctured convolutional codes (RCPC codes) and their applications,” *IEEE Trans. on Comm.*, vol. 36, no. 4, pp. 389–400, Apr. 1988.
- [4] S. Denic, “Robust incremental redundancy hybrid arq coding for channels with unknown interference,” in *Information Theory Proceedings (ISIT), 2011 IEEE International Symposium on*, Aug. 2011, pp. 1658–1662.
- [5] I. Andriyanova and E. Soljanin, “Ir-harq schemes with finite-length punctured ldpc codes over the bec,” in *Information Theory Workshop, 2009. ITW 2009. IEEE*, Oct. 2009, pp. 125–129.
- [6] R. L. Dobrushin, “Asymptotic bounds on error probability for transmission over DMC with symmetric transition probabilities,” *Theory Probab. Appl.*, vol. 7, pp. 283–311, 1962.
- [7] M. V. Burnashev, “Data transmission over a discrete channel with feedback. random transmission time,” *Probl. Inf. Transm.*, vol. 12, no. 4, pp. 10–30, 1976.
- [8] —, “Sequential discrimination of hypotheses with control of observation,” *Math. USSR, Izvestia*, vol. 15, no. 3, pp. 419–440, 1980.
- [9] J. Schalkwijk and T. Kailath, “A coding scheme for additive noise channel with feedback-i: No bandwidth constraint,” *IEEE Trans. on Info. Th.*, vol. IT-12, no. 2, pp. 172–182, Apr. 1966.
- [10] Y. Polyanskiy, H. Poor, and S. Verdú, “Variable-length coding with feedback in the non-asymptotic regime,” in *Information Theory Proceedings (ISIT), 2010 IEEE International Symposium on*, June 2010, pp. 231–235.
- [11] Y. Polyanskiy, H. Poor, and S. Verdú, “Feedback in the non-asymptotic regime,” *Information Theory, IEEE Transactions on*, vol. 57, no. 8, pp. 4903–4925, Aug. 2011.
- [12] T.-Y. Chen, N. Seshadri and R. D. Wesel, “A sphere-packing analysis of incremental redundancy with feedback,” in *Proc. Int. Conf. Commun. (to appear)*, Kyoto, Japan, Jun. 2011.
- [13] T.-Y. Chen, N. Seshadri, and R. Wesel, “Incremental redundancy: A comparison of a sphere-packing analysis and convolutional codes,” in *Information Theory and Applications Workshop (ITA), 2011*, Feb. 2011, pp. 1–5.
- [14] Y. Polyanskiy, H. Poor, and S. Verdú, “Minimum energy to send bits through the gaussian channel with and without feedback,” *Information Theory, IEEE Transactions on*, vol. 57, no. 8, pp. 4880–4902, Aug. 2011.
- [15] T. Cover and J. Thomas, *Elements of Information Theory*. New York: Wiley, 1991.
- [16] S. Boyd and L. Vandenberghe, *Convex Optimization*. New York, NY, USA: Cambridge University Press, 2004.
- [17] S. Lin and D. J. Costello, *Error Control Coding, Second Edition*. Upper Saddle River, NJ, USA: Prentice-Hall, Inc., 2004.